

Available finish:- Anthracite Only

Read these instructions before commencing installation. Please give these instructions to the owner/occupier after installation to retain for future reference/maintenance.

IP65 IK08 240VAC~50Hz 1.0m 40W - 60W

These fittings are Class I and must be Earthed

Important Information

It is recommended that these luminaires are installed and fitted by a qualified electrician ensuring the installation complies with current wiring regulations & local building control. These products are designed for connection to a 240VAC~50Hz supply. Any faulty, broken or damaged luminaires should be replaced immediately. KSR will not accept responsibility for any claims arising from a poor installation. Please Note: The limited warranty shall be deemed null and void in the following circumstances: Failure by the installer, end user or any third party to exercise caution to protect any covered product or part from outside damage, humidity conditions, fluctuations in the electrical system or physical abuse as well as failure related to workmanship in the installation of the products or parts.

Important User Advice




Always safely isolate the mains supply before installing/servicing. Please note this luminaire is Non Dimmable (DALI Version available on request). General maintenance and cleaning should be performed at least quarterly. Clean product outer using a damp cloth, the glass / diffuser can be cleaned with hot soapy water, dried and buffed to a shine. Protection from exposure to natural elements in the form of a non-abrasive water repellent protection (car wax). Grease screws and nuts with a suitable waterproof repellent will ensure the product gives you a long lasting trouble free life/finish. At the end of life the luminaire is classed as WEEE under directive 2014/30/EU and should be disposed of in accordance with local legislation.

Installation Procedure

Ensure mains supply is turned off. Unscrew the top cap to access and set up the wattage and colour temperature as required - NOTE - THE MAINS CONNECTIONS DO NOT NEED TO BE TOUCHED OR REMOVED - FITTING IS PRE-WIRED. ensure the top cap is re-fitted correctly & tightened with the seal in place. Offer the fitting over the intended pole and ensure it is fully in place so that all the bolts can be properly located & tightened, tighten to the correct torque setting (15NM). connect the supplied 500mm cable directly to the mains or if you need to extend, please do so ensuring the correct cable and appropriate in-line connector are used. **Photocell version** (KSR99114) - Photocell is built into the fitting and is non-adjustable :- **ON** = Less than 15 Lux & **OFF** = Greater than 20 Lux Turn on the mains power and test.

Unscrew Top cap to remove top diffuser to gain access to the wattage selector switch - located on the driver and also the CCT selector switch.

Dip Switch Wattage Selector located on the Driver. (Only when Power Off).

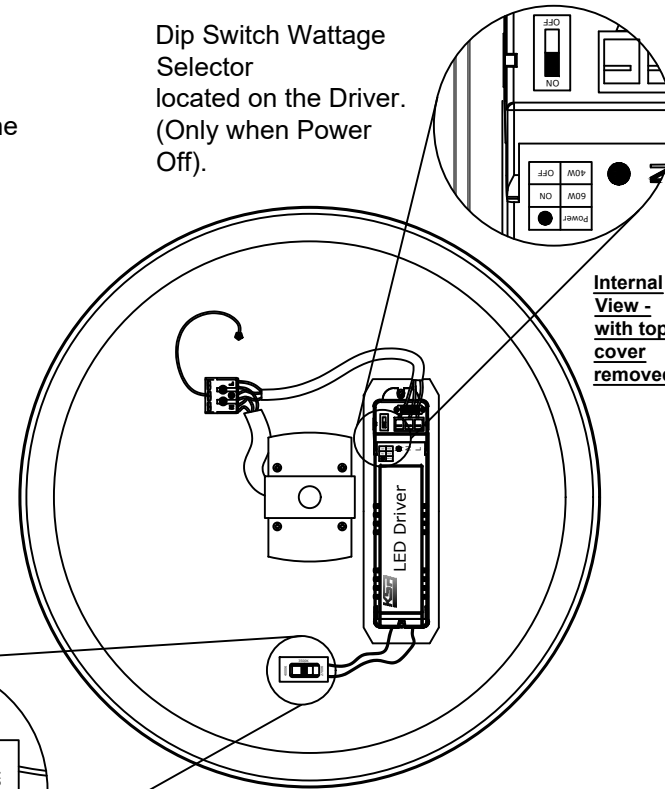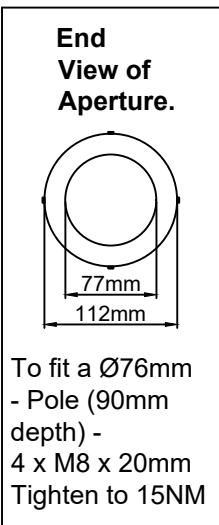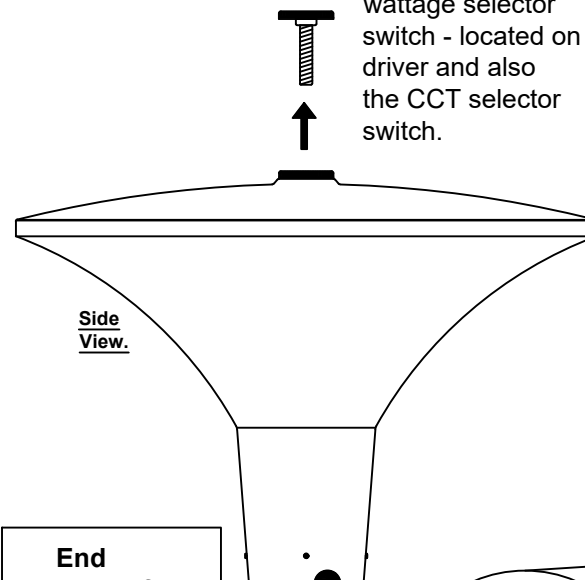

Internal View - with top cover removed.

Choose the fitting colour temperature via the CCT Switch (Only with Power Off).





Fig.1



Product Code	Wattage	Beam Angle	CCT	Lumen output
KSR99113 & KSR99114 (560mm Diameter & 400mm Height)	40W	128°	2700K	4080lm
			3500K	4380lm
			4000K	4360lm
	60W	128°	2700K	5755lm
			3500K	6200lm
			4000K	6095lm

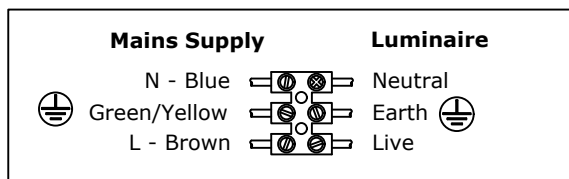

This product contains a light source of energy efficiency class E The Control Gear in this product can be replaced by a professional.