

USB EXTENSION LEAD WITH USB A + C FAST CHARGER

Your ultimate travel companion.
Power and charge your mobile devices, ideal for phones and tablets.





BRIEF PRODUCT DESCRIPTION

This Masterplug compact extension lead provides an excellent solution when travelling. Perfectly sized to fit into a travel case, it is ideal for trips to hotels, offices, coffee shops, airports or the home. With two sockets and a dual-port USB design, it allows you to power and charge four devices simultaneously. The USB A and C ports offer universal compatibility for the latest or legacy devices, whether that be your smartphone, tablet, or any other USB-powered product.

This charger has the ability to charge your mobile device from 0-50% in 30 minutes.

FEATURES



- Ideal for hotels, offices, coffee shops, airports, back to school, home and more
- Suitable for cruise ships
- Charge 4 devices simultaneously: 2 x UK sockets and 2 x USB's
- Type A and Type C USB ports provide universal compatibility for the latest and legacy products
- Fast and Safe Charging – Supports Power Delivery 3.0 (PD) and Qualcomm Quick Charge 3.0 (QC)
- Travel Ready – cable wraps neatly around the sockets, fastens securely with a strap, ready for travel
- Safety First – built-in protection, your device remains safe from overcurrent, overcharging, overheating and short-circuiting
- Supplied with 0.45m of Cable - ideal for floor or hotel desk positioning



PRODUCT IMAGES



LINE DRAWING

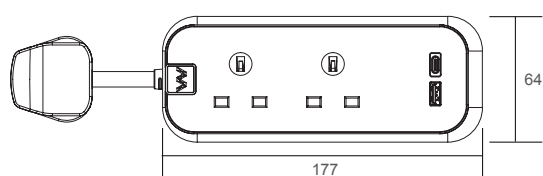



USB

EXTENSION LEAD WITH USB A + C FAST CHARGER


PRODUCT INFORMATION

Part Number	TAUK2UAC20B
Product Dimensions	Height 28mm x Width 177mm x Depth 64mm
Input	220 - 240V AC
Input Frequency	50/60Hz

USB Output

USB Ports	1 x Type A and 1 x Type C		
USB C Output			
Output Power	20W Max		
Output	5V/3A; 9V/3A; 12V/2.5A		
Output Protocols	PD3.0; QC3.0; Apple; AFC; FCP; BC1.2		
USB A Output			
Output Power	18W Max		
Output	5V/3A; 9V/2A; 12V/1.5A		
Output Protocols	QC3.0; BC1.2; Apple 2.4A; AFC; FCP		
USB output when both ports are in use	17W		
Output	5V/3.4A		
	Port	A	C
	Single Port	18W	20W
	C + A	17W	

TECHNICAL SPECIFICATIONS

This product is certified to applicable British safety standards		
LVD	IEC 62368	
EMC	IEC 61000	
ERP	EN 50563	
British Standard	BS 1363-2	
Type A		
USB Output	5.0V \pm 3.0A 15.0W	
Average Active Efficiency	>81.39%	
Efficiency at 10% Load	>72.48%	
No Load Power Consumption	\leq 0.1W	
USB Output	9.0V \pm 2.0A 18.0W	
Average Active Efficiency	>85.00%	
Efficiency at 10% Load	>75.45%	
No Load Power Consumption	\leq 0.1W	
USB Output	12.0V \pm 1.5A 18.0W	
Average Active Efficiency	>85.00%	
Efficiency at 10% Load	>73.04%	
No Load Power Consumption	\leq 0.1W	



USB

EXTENSION LEAD WITH USB A + C FAST CHARGER

TECHNICAL SPECIFICATIONS

Type C

USB Output	5.0V=3.0A 15.0W
Average Active Efficiency	>81.39%
Efficiency at 10% Load	>72.48%
No Load Power Consumption	≤0.1W
USB Output	9.0V=2.2A 19.8W
Average Active Efficiency	>85.43%
Efficiency at 10% Load	>75.92%
No Load Power Consumption	≤0.1W
USB Output	12.0V=1.67A 20.0W
Average Active Efficiency	>85.43%
Efficiency at 10% Load	>75.19%
No Load Power Consumption	≤0.1W

Type A + C

USB Output	5.0V=3.4A 17.0W
Average Active Efficiency	>82.15%
Efficiency at 10% Load	>73.27%
No Load Power Consumption	≤0.1W

IF IN DOUBT CONSULT A QUALIFIED ELECTRICIAN

SAFETY WARNING

PLEASE READ CAREFULLY AND USE IN ACCORDANCE WITH OUR SAFETY INSTRUCTIONS BELOW

- DO** uncoil the cable before use
- DO** position the cable carefully to avoid accidents
- DON'T** use it in wet conditions
- DON'T** allow heavy tools etc to hang unsupported on the cable or from the socket
- DON'T** remove the 13 amp plug and wire directly into a mains supply
- DON'T** exceed the total maximum load 13amps = 3120 watts. 220-240 volts AC.
- DON'T** dismantle, no serviceable parts inside

FOR IT EQUIPMENT USE ONLY
FOR INDOOR USE ONLY