





	INSTALLATION CONTACTORS (INC)									
	20		25		40		63		63	
	INC202		INC254		INC402		INC632		INC634	
RATING (Ith) A	20		25		40		63		63	
PART NUMBER	INC202		INC254		INC402		INC632		INC634	
GTIN-13	5060523520473		5060523520480		5060523520497		5060523524747		5060523520503	
INNER CARTON QUANTITY	1		1		1		1		1	
OUTER CARTON QUANTITY	6		4		4		4		3	
NUMBER OF POLES (N/O)	2		4		2		2		4	
WEIGHT (1PC) Kg	0.146		0.235		0.26		0.26		0.36	
DEVICE WIDTH (mm)	18		36		36		36		54	
HEAT DISSIPATION SPACERS (add 18mm to module width)	2x9mm(18mm)		2x9mm(18mm)		2x9mm(18mm)		2x9mm(18mm)		2x9mm(18mm)	
AC-7a (A)	20		25		40		63		63	
AC-7b (A)	6.4		15		8.5		20		20	
Ith (thermal) A	20		25		40		63		63	
Holding VA	2.7		4.6		4.6		6.5		6.5	
Inrush VA	9.2		34		34		53		53	
Dissipated W	1.2		1.6		1.6		2.1		2.1	
TORQUE SETTING (CONTROL CIRCUIT) A1 A2	0.8Nm		0.8Nm		0.8Nm		0.8Nm		0.8Nm	
TORQUE SETTING (POWER CIRCUIT)	0.8Nm		3.5Nm		0.8Nm		3.5Nm		3.5Nm	
MAXIMUM CABLE CAPACITY (mm <sup>2</sup> )	4		16		4		16		16	
RATED VOLTAGE (Un/AC)	230V									
FREQUENCY (Hz)	50/60									
PROTECTION DEGREE (IP)	20									
MOUNTING	35mm DIN RAIL									
MATERIAL	PA6 NYLON									
ORIGIN OF MANUFACTURE	CHINA									



AC-7a: Small Inductive loads in domestic dwellings such as TV, mixers, drills, etc

AC-7b: Rotating machines in domestic dwellings such as fans, central vacuum cleaners, washing machines etc

DIMENSIONS

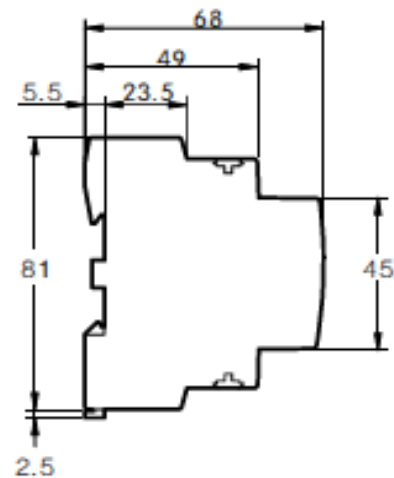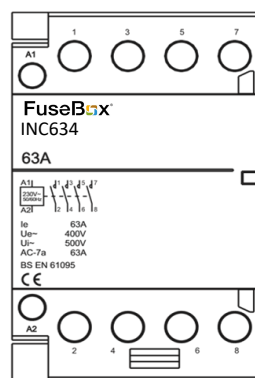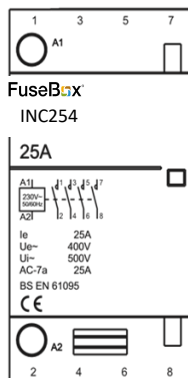

INSTALLATION

