

JC1001/WH


V50

V50 Fire-rated LED downlight 6W 700lm IP65 WH



Features & Benefits

- Two colour selectable from below the ceiling 3000K & 4000K
- Ultra-low profile suitable for shallow 50mm ceiling voids
- Tested for use in fire-rated ceilings
- IP65 suitable for bathrooms (internal use only)
- Strong protected spring clips
- Fast push-fit termination with remote driver
- Twist & lock bezel design
- Available as complete fixture (JC1001) or without bezel (JC1001/NB)
- JC1001/NB requires separate bezel (JC1006)
- 2 years standard warranty extends to a 3 year commercial warranty or 5 year domestic warranty when registered within the first year of purchase (See Website for terms and conditions)
- This product contains a light source of energy efficiency class D



General Information

| | |
|------------------------|--|
| Mounting | Recessed |
| Trade Name | V50 |
| Environment | Indoor |
| Product Group | Fire-rated Downlights |
| Color Finish | White |
| Product Shape | Round |
| Product Range | V50 |
| Overall Dimensions | Ø84 x 67.7 |
| Height (mm) | 67.7 |
| Diameter (mm) | 84 |
| Product Weight(kg) | 0.29 |
| Light Source | LED |
| Light Source Features | Colour Selectable |
| Additional Information | Maximum ceiling thickness is 30mm |
| Luminaire Accessories | Black, Brushed Brass, Brushed Nickel or Chrome Replacement Bezel; Concealer Ring; Converter Plate |

| | |
|-------------------------------------|---|
| Overall dimensions (mm) Rim | Ø84 |
| Recommended product location | Indoor use only |
| Minimum Void Requirement | 50mm |
| Method of fix | Recessed with Spring Clips |
| Product Aperture Size | 70mm |
| IP Rating | IP65 |
| Duration of Fire protection (Mins) | Tested for use in fire-rated ceilings. Full information and up-to-date fire testing certificates for ceiling system types are available on JCC.CO.UK |
| Origin of manufacturer | Made In China |
| Warranty | 5 Year Warranty(domestic) 3 Year(Commercial) (See Website for terms and conditions) |
| Dimming Protocol Compatibility | Triac |
| Driver manufacturer | JCC |
| LED manufacturer/type | Hongli |
| Lighting Product Type 1 | Fired Rated Downlights |
| Customs Tariff code** | 9405421000 |

Electrical

| | |
|--------------------------------------|--|
| Voltage Rating | 230-240 |
| Primary Running Current(Amp) | 0.042 |
| Inrush current(Amps) | 0.325A |
| Operating Frequency Hz | 50/60Hz |
| Secondary running current(mA) | 145 |
| Constant Current or Constant Voltage | CC |
| Luminaire Circuit Wattage | 6 |
| Class | II |
| Output Voltage Max/Range (VDC) | 30-44 |
| Input Electrical Connections | Push Fit Terminals LEN Loop In/Loop Out |
| Dimmable | Yes |
| Max No. In Run | 30 |

Thermals

| | |
|--------------------------------|---|
| Insulation Coverage | Loosely Cover with Mineral Wool Insulation |
| Minimum Void Requirement | 50mm |
| Operating Temperature Range °C | 0 to 26 |

Performance Data

| | |
|-------------------------|--|
| LED Life (Hours)* | 51000 |
| Energy Rating | This product contains a light source of energy efficiency class D |
| Actual Lumen Output | 650/700 |
| Lumens Per Circuit Watt | 108/116 |
| Color Rendering Index | 80-89 |
| CRI: Ra | 80 |

Correlated Color Temperature

3000K/4000K

Beam Angle °

60

LOR (Light Output Ratio) %

100

Photometry Available

Yes: available on request.

Construction

Primary Material

Steel

Lens

Polycarbonate

Heat Sink

Aluminium

Driver Housing

Polycarbonate

Rim or Attachment

Die-cast Aluminium

Packaging

Product Packaged Weight(kg)

0.4

Quantity Per Outer Carton

30

Product Bar Code EAN-13 Number

5052544081231

Standards & Approvals

Manufactured in accordance to

BS EN 60598:2015, 2-1, 2-2

CE Marked

Yes

UKCA Marked

Yes

Date code/Purchase order No.

Yes

WEEE symbol



Yes


Certificate Of Conformity

Available on request

Accredited Members

LIA, ISO9001-2015, ISO14001-2015

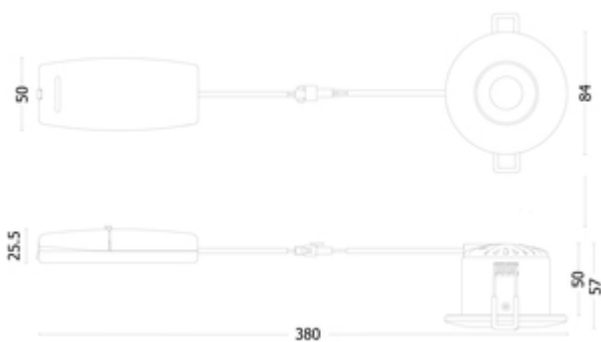

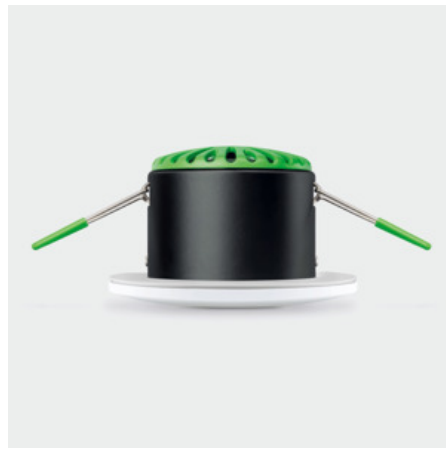

*Hours life stated is an indication of expected L70 chip and light output calculations when operating in optimum conditions. Product warranty period supports the full product during the term given. The L70 hours expectancy is not correlated with the full product warranty term, nor is it a representation of lumen depreciation during the warranty period.

**JCC Lighting Limited makes every effort to ensure that the Customs Tariff information in this document is timely and accurate. However, it's not possible for us to assure the absolute veracity and completeness of that information, as errors may occur. The placement of any inaccurate tariff information is completely unintentional. JCC Lighting Limited reserves the right, in its sole discretion, to correct any errors or omissions to the tariff code and to make any and all changes contained in this document at any time and without notice. It is the sole responsibility of the importer to ensure that the commodity code advised is correct for the products/goods being supplied by JCC Lighting Limited. JCC Lighting Limited does not assume any liabilities, losses, costs, and expenses arising out of or related to the importers use of this commodity code or the information related to the import of any JCC Lighting products.

JCC Lighting LTD, Lux Park, Chichester Business Park, City Fields Way, Tangmere, Chichester, West Sussex, PO20 2FT.
Sales: 01243 838999 (8am to 5pm Monday to Friday) Fax: 01243 838998 | sales@jcc.co.uk | www.jcc.co.uk
Company Registration Number: 03044848 | VAT Number: 918544112

This document is uncontrolled if printed, all information is subject to change

Version 221 [04/06/2024]