


# JC1101/WH10

## X50

X50 Fire rated downlight 3W/5W IP65 3000/4000/5700K 400/650 lms White (10 pack)

### Features & Benefits

- Two wattage and three colour selectable from beneath the ceiling
- Two-part first fix connector with dedicated testing terminals
- Double hinged terminal for easy access to terminal blocks
- Tested for use in Solid, I-Joist and Steel Open Web joist ceilings
- Multipack of 10 with white bezel (JC1101/WH10)
- Triac dimmable as standard, see JCC.co.uk for approved dimmer list

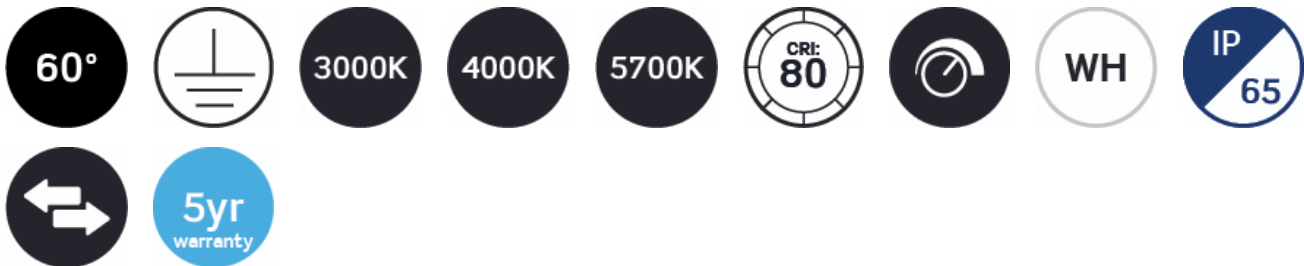

### General Information

Mounting	<b>Recessed</b>
Environment	<b>Demanding</b>
Suitable For Zones	<b>Zone 1</b>
Product Group	<b>Fire-rated Downlights</b>
Color Finish	<b>White</b>
Product Shape	<b>Round</b>
Product Range	<b>X50</b>
Overall Dimensions	<b>84Ø x 55.4 x 322 cm (ssee profile drawing for details)</b>
Length (mm)	<b>322</b>
Height (mm)	<b>55.4</b>
Diameter (mm)	<b>84</b>
Product Weight(kg)	<b>0.266</b>
Light Source	<b>LED</b>
Light Source Features	<b>3CCT Switchable</b>
Additional Information	<b>For Emergency version, use JC131003 only. Not suitable for use with JCEM002/JCEM002ST</b>

Recommended product location	<b>Indoor use only</b>
Minimum Void Requirement	<b>50mm</b>
Method of fix	<b>Spring clips</b>
Distance from lighted object	<b>0.3m</b>
IP Rating	<b>IP65</b>
Duration of Fire protection ( Mins)	<b>Tested for use in fire-rated ceilings. Full information and upto-date fire testing certificates for ceiling system types are available on JCC.CO.UK</b>
Origin of manufacturer	<b>China</b>
Warranty	<b>5 Year Warranty(Terms &amp; conditions apply)</b>
Dimming Protocol Compatibility	<b>Triac dimmable</b>
Driver manufacturer	<b>JCC</b>
Lighting Product Type 1	<b>Downlight</b>
Lighting Product Type 2	<b>Fire-rated</b>

## Electrical

Voltage Rating	<b>230-240</b>
Primary Running Current(Amp)	<b>0.0018/0.0026</b>
Operating Frequency Hz	<b>50/60</b>
Secondary running current(mA)	<b>0.0083/0.0127</b>
Constant Current or Constant Voltage	<b>CC</b>
Luminaire Circuit Wattage	<b>3/5 selectable</b>
Class	<b>I</b>
EMC Compliant (EN55015)	<b>Yes</b>
Input Electrical Connections	<b>Live, Earth, Neutral</b>
Dimmable	<b>Yes, Triac dimmable only</b>

## Thermals

Thermal Cut Out	<b>Yes</b>
Insulation Coverage	<b>Loosely Cover with Mineral Wool Insulation</b>
Minimum Void Requirement	<b>50mm</b>
Operating Temperature Range °C	<b>0 to 26</b>

## Performance Data

Energy Rating	<b>This product contains a light source of energy efficiency class B(3W) or C (5W) for selected Wattage</b>
Actual Lumen Output	<b>480/700</b>
Lumens Per Circuit Watt	<b>160/140</b>
Color Rendering Index	<b>80-89</b>
CRI: Ra	<b>80</b>
Correlated Color Temperature	<b>3000/4000/5700K</b>
Beam Angle °	<b>60°</b>
LOR (Light Output Ratio) %	<b>100</b>
Photometry Available	<b>Yes</b>

# Packaging

Product Bar Code EAN-13 Number

5052544121623

## Standards & Approvals

Manufactured in accordance to

**BS EN 60598:2015, 2-1, 2-2**

CE Marked

**Yes**

UKCA Marked

**Yes**

Date code/Purchase order No.

**Yes**

WEEE symbol




**Yes**

Certificate Of Conformity

**available on request**

Accredited Members

**LIA, ISO9001-2015, ISO14001-2015**

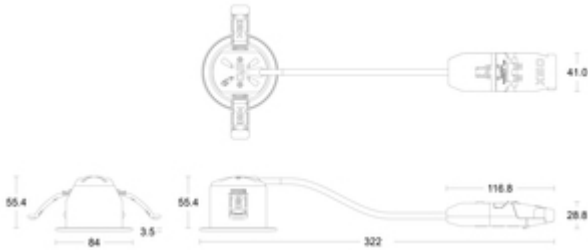

---

JCC Lighting LTD, Lux Park, Chichester Business Park, City Fields Way, Tangmere, Chichester, West Sussex, PO20 2FT.  
Sales: 01243 838999 (8am to 5pm Monday to Friday) Fax: 01243 838998 | [sales@jcc.co.uk](mailto:sales@jcc.co.uk) | [www.jcc.co.uk](http://www.jcc.co.uk)  
Company Registration Number: 03044848 | VAT Number: 918544112