



LTTD6CCT

6W ECO LED Tilttable 4-Colour IP65 Fire Rated Downlight

This 6W tilttable fire-rated downlight is designed for superior functionality and modern aesthetics. Its adjustable tilt feature allows precise light direction, making it ideal for accent lighting or highlighting specific areas. Equipped with a 3-pin push-in connector and loop-in/out wire block, it ensures quick and straightforward installation. The downlight offers a 4-level CCT adjustable switch (2700K, 3000K, 4000K, and 6000K), providing customizable color temperature options to match diverse lighting needs.

Rated for up to 90 minutes of fire protection, it is certified for use with solid joists, I-Joists, and Metal-Web joists, ensuring safety and reliability in residential and commercial settings. With its slim, compact design and tilttable functionality, this downlight is a versatile solution for spaces requiring adaptable and efficient lighting.



25° Tilttable Bezel



3 Pin Push-in Connector



4CCT Changing Switch



Easy install Push-in Loop IN / OUT Connector


Features & Benefits:

- Lumen Output: up to 720lm
- Power: 6w
- 4 CCT Switch: 2700K - 3000K - 4000K - 6000K
- Available in 10pcs Multi-pack
- Tilttable bezel: 25°
- Beam Angle: 55°
- IP65 Rated
- CRI>80
- Iron Body Material
- Trailing & Leading Edge Dimmable
- Solid Joist, I-Joist or Metal-Web Joist Certified
- Slim Profile Suitable for Shallow Void Ceilings
- Insulation Coverable
- External Driver with 3 Pin Push-in Connector
- Easy Wiring with Loop In / Out Colour Coded Push-fit Piano Terminals
- Interchangeable Bezels available (white included, others sold separately)
- Warranty: 5 Years

4CCT Changing Switch

2700K 650lm	3000K 660lm	4000K 720lm	6000K 720lm
-----------------------	-----------------------	-----------------------	-----------------------

Dimensions:

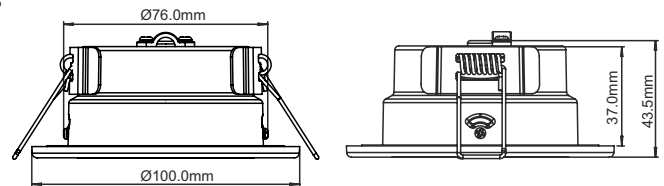

Technical Specifications:

Input Voltage:	220-240 V/AC,50-60Hz	CRI:	>80
Power:	6W	Beam Angle:	55°
LEDs:	SMD	IP Rating:	IP65 front
Driver:	External	Protection Class:	Class II
CCT Changeable:	2700/3000/4000/6000K	Housing:	Iron
Light Output:	650 - 720lm	Operating Temp.:	-15°C to +40°C
Dimensions:	(D)Ø100 x (H)42mm	Dimmable:	Trailing/Leading Edge
Cut-Out:	Ø82mm	Switch Cycles:	100,000
Energy Class:	E	Warranty:	5 years

