



LTLD8CCT

5/7W ECO LED Four-Colour IP65 Fire Rated Downlight

This 5/7W adjustable power fire-rated downlight combines durability with exceptional versatility. It features a convenient 3-pin push-in connector and loop-in/out wire block for hassle-free installation. Featuring a 4-level CCT changeable switch (2700K, 3000K, 4000K, and 6000K), it provides flexible colour temperature options to suit a variety of lighting needs.

Tested to provide up to 90 minutes of fire protection, it is certified for use with solid joists, I-Joists, and Metal-Web joists, making it ideal for both residential and commercial applications. Its slim, low-profile design ensures compatibility with tight spaces, delivering an efficient and stylish lighting solution wherever space is at a premium.



Features & Benefits:

- Lumen Output: up to 830lm
- Dual Power Changing Switch 5W / 7W
- 4 CCT Switch: 2700K - 3000K - 4000K - 6000K
- Beam Angle: 55°
- IP65 Rated
- CRI>80
- Iron Body Material
- Trailing & Leading Edge Dimmable
- Solid Joist, I-Joist or Metal-Web Joist Certified
- Slim Profile Suitable for Shallow Void Ceilings
- Insulation Coverable
- External Driver with 3 Pin Push-in Connector
- Easy Wiring with Loop In / Out Colour Coded Push-fit Piano Terminals
- Interchangeable Bezels available (white included, others sold separately)
- Warranty: 5 Years

4CCT Changing Switch


CCT:	2700K	3000K	4000K	6000K
5W:	560lm	580lm	630lm	610lm
7W:	750lm	770lm	830lm	800lm



3 Pin Push-in Connector




Easy install Push-in Loop IN / OUT Connector

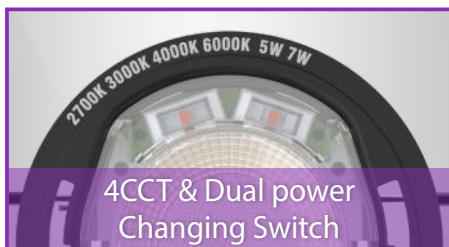

4CCT & Dual power Changing Switch

Dimensions(mm):

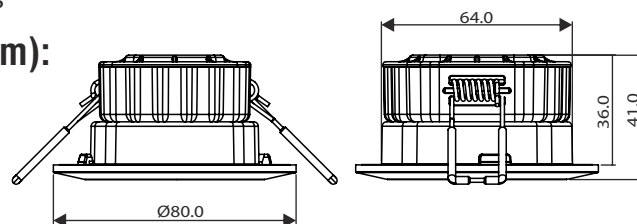


Technical Specifications:

Input Voltage:	220-240 V/AC,50-60Hz	CRI:	>80
Power:	5W/7W Switchable	Beam Angle:	55°
LEDs:	SMD	IP Rating:	IP65 front
Driver:	External	Protection Class:	Class II
CCT Changeable:	2700/3000/4000/6000K	Housing:	Iron
Light Output:	750 - 830lm	Operating Temp.:	-15°C to +40°C
Dimensions:	(Diam.)Ø80 x (D)36mm	Dimmable:	Trailing/Leading Edge
Cut-Out:	Ø68-70mm	Switch Cycles:	100,000
Energy Class:	E	Warranty:	5 years



Non-replaceable light source



Non-replaceable control gear