

LED LITE™

Energy Saving LED





Ultra Slim LED Floodlights



NEW design LED Ultra Slim Floodlights for exterior/interior. Applications include: Gardens, Bushes/Shrubs, Security Lighting, Porch Lighting and Area Floodlighting, Factories, Offices


Dimensions(mm):

Features:

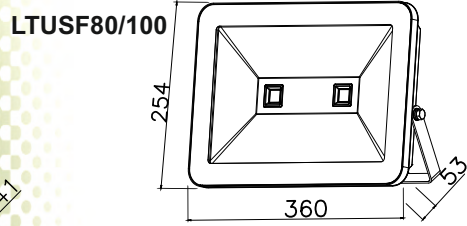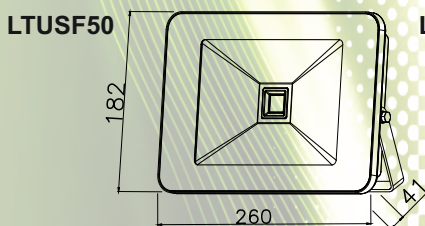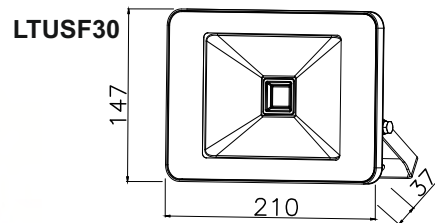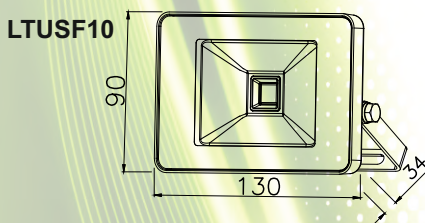

- Voltage Range: 220-240V
- Beam Angle: 120°
- IP65
- Warranty: 3 Years
- Class I, requires earth connection
- Optional Garden Spike (not included)
- Shatter Resistant Tempered Glass
- Not Dimmable
- Adjustable Bracket
- Pre wired with 60cm rubberised cable

Specifications:



Model	Power	Voltage	CCT	Lumens	Beam Angle	Dimensions	Weight
LTUSF10	10W	220-240V/AC	3000-6500k	700lm	120°	130*90*34mm	0.36 kgs
LTUSF30	30W	220-240V/AC	3000-6500k	2450lm	120°	210*147*37mm	0.765 kgs
LTUSF50	50W	220-240V/AC	3000-6500k	4000lm	120°	260*182*41mm	1.6 kgs
LTUSF80	80W	220-240V/AC	3000-6500k	6400lm	120°	360*254*53mm	3.1 kgs
LTUSF100	100W	220-240V/AC	3000-6500k	7700lm	120°	360*254*53mm	3.1 kgs