

Technical Specification

- Operating water pressure 1-10 bar (15-150psi)
- Water connection – 15mm plain shank push fit or standard 1/2" BSP compression fittings
- Twin terminal blocks for left or right hand electrical connection
- Top, bottom side and rear pipe entry and top, bottom and rear cable entry options from the right or left hand side
- kW loading at 240V: 7.2, 8.5 or 9.5
- Recommended cable sizes and fuse ratings:
 - 7.2kW – 6mm² 30 Amps
 - 8.5kW – 6-10mm² 40 Amps
 - 9.5kW – 10mm² 45 Amps

Part numbers and short codes:

53563002	X7R – Expressions® Revive	7.2kW
53563202	X8R – Expressions® Revive	8.5kW
53563402	X9R – Expressions® Revive	9.5kW
53565002	XP7R – Expressions® Revive Plus	7.2kW
53565202	XP8R – Expressions® Revive Plus	8.5kW
53565402	XP9R – Expressions® Revive Plus	9.5kW

Slimmest
Expressions
Shower Ever

new!



Redring Expressions®
Revive showers feature
SmartFit™2 technology
for easy installation.

REDRING

Redring Xpelair Group Ltd
Newcombe House Newcombe Way
Orton Southgate Peterborough
PE2 6SE

General: 0844 372 7761
Sales: 0844 372 7750
Technical: 0844 372 7766
International: +44(0)1733 456789

GlenDimplex
NORTHERN IRELAND

5 Charlestown Avenue
Charlestown Industrial Estate
Craigavon Co. Armagh
BT63 5ZF

Telephone: (028) 38 337317
Email: sales@glendimplexni.co.uk



www.redring.co.uk

Expressions
Revive
Electric Shower

REDRING

Features & Benefits

- **SmartFit™ 2 technology**
Improved working access and 8 cable and 6 pipe entry points to replace virtually any electric shower
- **Sleek styling**
Elevated dials and a smooth finish
- **Separate dials**
For power and temperature/flow control enables easy operation of settings
- **Push button start/stop**
Offers simple 'set and forget' convenience to allow users to leave the shower at their preferred temperature and flow settings
- **Phased shutdown**
Flushes residual hot water at switch off to ensure a safe starting temperature for the next user (Plus models only)
- **Inlet filter**
Can be easily changed without the need to remove the shower cover
- **All chrome FlexiKit™ accessories**
1.25m hose, 580mm riser rail, soap dish, 6 mode shower head and adjustable fixing brackets
- **2 year UK warranty**
For extra peace of mind

SMARTFIT2


Enhanced backplate has significantly improved working access

Dual terminal blocks allow electrical connection from the right or left hand side

Fully interchangeable with previous generation Expressions showers



Now includes compression fit elbow for extra convenience

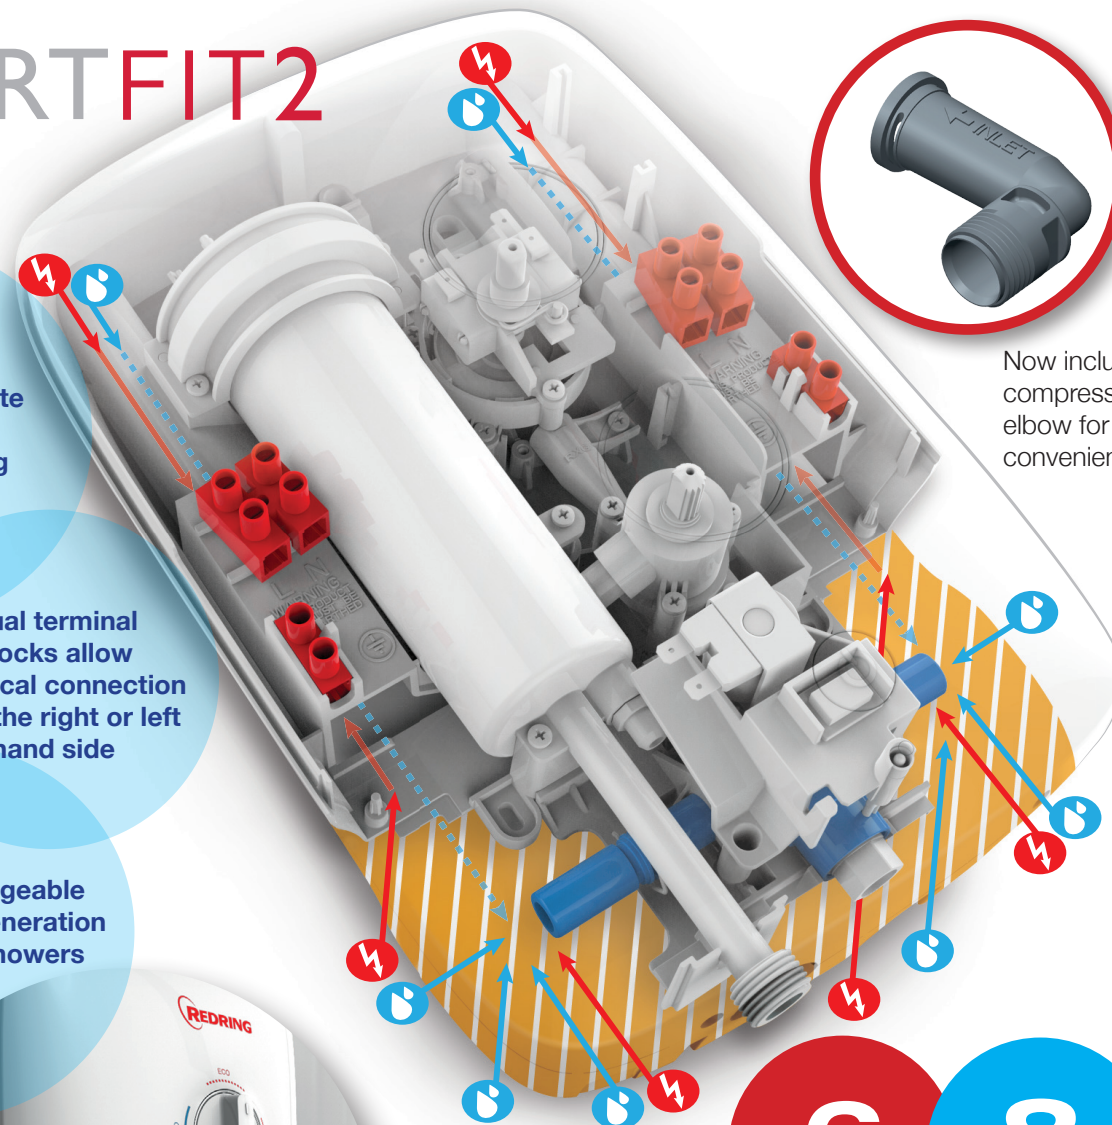

6
cable entry points

8
pipe entry points

Multiple cable and pipe entry points are accurately positioned and sized for optimal replacement, with minimal disruption to existing pipework and décor.

