



Data Sheet

Product Code: XDY5U2BS.PD

Product Description: 2-Gang 13A Unswitched Socket with 5V DC 2100mA USB Charging Ports

Range: Screwless

Finish: Primed

Product Category: 13A Socket + USB

Insert/Knob Colour: Black Inserts

Barcode: 5021575192681

Dimensions: 86x147x28mm

Faceplate Depth: 4mm

Net Weight: 189g

Gross Weight: 192g

Fixing Centres: 120.6mm

Depth from Mounting Face: 24mm

Recommended Back Box Depth: 35mm

Operating Voltage: 230v 50Hz

Maximum Load Rating: 13A

Maximum Current Rating: 0A

Terminal (Live) Diameter: 4.8mm; **Capacity:** 4 x 2.5mm²

Terminal (Neutral) Diameter: 4.8mm; **Capacity:** 4 x 2.5mm²


Terminal (Earth) Diameter: 4.8mm; **Capacity:** 4 x 2.5mm²

Intended Applications: Indoor Use Only. Domestic power supply.

Safety Advice: Please note recommended back box depth relies on efficient cable routing.. Product Must Be Earthed.

Applicable Safety Standard: BS 1363-2

Commodity Code: 85366990

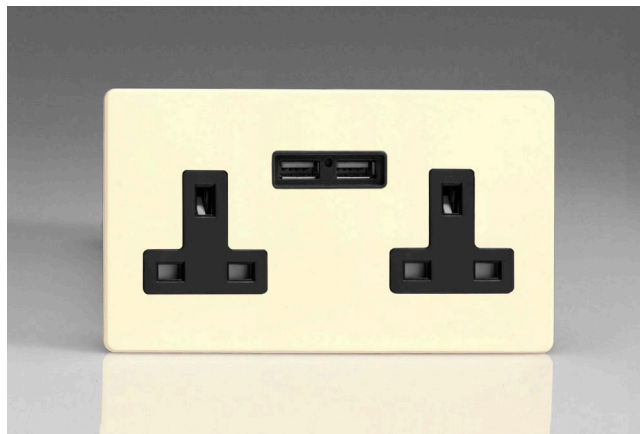

Product Features

- ☑ Ideal for charging iPad, iPhone, tablets, mobiles and cameras
- ☑ Features VARILIGHT Smart Port technology making it suitable for all types of devices.
- ☑ The USB port detects the device to be charged and optimises its output accordingly to achieve the fastest possible charging speed.
- ☑ Sleek, low-profile screwless faceplate
- ☑ For helpful tips on painting the Varilight Primed range, featuring different paints and methods, see our Varilight Primed - Best Practices article.



10 YEAR GUARANTEE

BRITISH MADE 

Declaration of Conformity

All information is subject to change without notice. Errors and omissions excepted. Images are for illustrative purposes only. Individual features and colours may vary. Refer to date of issue to identify latest version.

Date of Issue: 06th February 2022 © Doyle & Tratt Products Ltd, Carylls Lea, Faygate, West Sussex, RH12 4SJ, United Kingdom. All rights reserved.