

# WAGOBX<sup>®</sup>PRO




## Technical data

|                          |  |
|--------------------------|--|
| Rated Voltage            | 450V   |
| Rated Impulse voltage    | 4kV  |
| Rated Current            | 32A  |
| Maintenance Free current | Derate to 25A                                |
| Approvals                | BS EN-60670-1; BS EN-60670-22; BS5733 MF; CE |
| Connections              | Accepts up to 21 conductors                  |
| Material                 | Self extinguishing Polypropylene             |
| Colour                   | White  |
| Country of origin        | UK   |
| Customs Tariff           | 39269097900                                  |
| Environmental Compliance | R0HS Compliant                               |
| Weight                   | 55g  |

## Handling



Place connector against front edge & push down on rear until clicked into position.

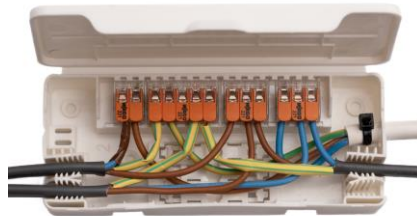

Flat cables simply push in.  
Drill hole at end of marker for round cable and secure with cable tie



Cable tie lid shut if Maintenance Free is required



For full instructions scan QR code