

**NATIONAL
VENTILATION**

Manufacturers & suppliers
of  **monsoon** products

Monsoon Zone 1 Silence Range



- Improved performance - can be installed with longer duct runs
- Quieter than ever - as low as 22dB(A)
- Easier to install - easier wiring and handy spirit level
- Comes with our highest ever warranty - 5 years


Call now to find out more: 01823 690 290

www.nationalventilation.co.uk Email: info@nvagroup.co.uk

CODE	DESCRIPTION
MONS100SA	100mm Standard Model 97m ³ /h
MONS100TA	100mm Timer Model adjustable from 2-30 minutes 97m ³ /h
MONS100HTA	100mm Timer/Humidistat/Pullcord Model adjustable from 60-90% 97m ³ /h
MONS100PCA	100mm Pull Cord Model 97m ³ /h
MONS100PIRA*	100mm Passive Infrared Model c/w Timer 97m ³ /h
MONDMEVWK	100mm Window Kit 97m ³ /h
MONSCHR	100mm Chrome Facia (not compatible with MONS100PIR)
MONS125SA	125mm Standard Model 185m ³ /h
MONS125TA	125mm Timer Model adjustable from 2-30 minutes 185m ³ /h
MONS125HTA	125mm Timer/Humidistat/Pullcord Model adjustable from 60-90% 185m ³ /h
MONS150SA	150mm Standard Model 370m ³ /h
MONS150TA	150mm Timer Model adjustable from 2-30 minutes 370m ³ /h
MONS150HTA	150mm Timer/Humidistat/Pullcord Model adjustable from 60-90% 370m ³ /h

* PIR model meets IPX4 standard

The Monsoon Silence range is the latest innovative domestic ventilation solution, providing high extraction rates with low energy use and exceptionally quiet running levels. The fan comes with a long life ball bearing motor and a silent back draft shutter preventing air travelling back up the duct and into the room. The casing and impeller are made of durable high quality plastic, which helps to prevent degradation and discolouration of the plastic over time. The MONS - 100, 100T, 100HT and 100PC are also now available in a chrome finish, making this stylish fan match well with any modern interior.

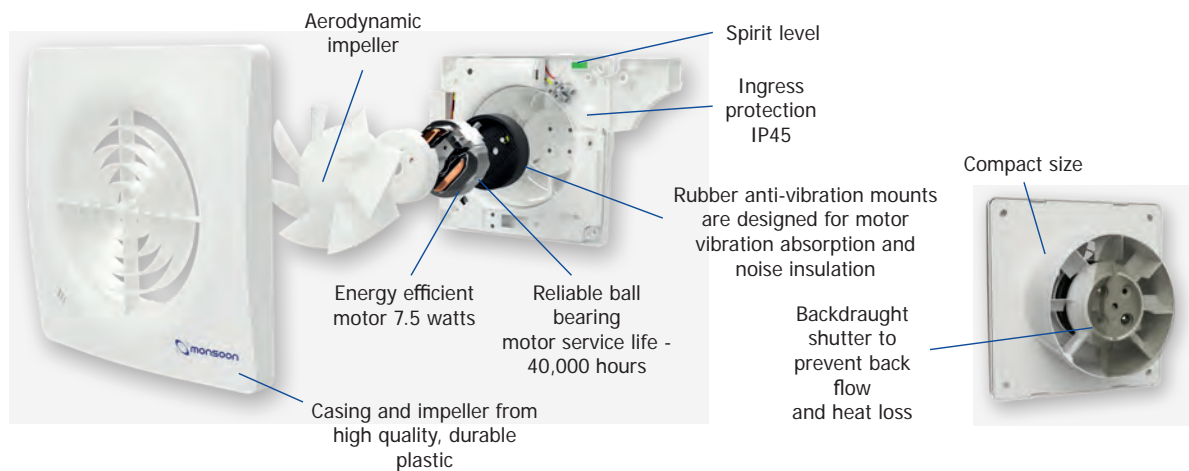

Call now to find out more: 01823 690 290



www.nationalventilation.co.uk Email: info@nvagroup.co.uk

Technical data


	MON-S100		MON-S125		MON-S150	
	High	Low	High	Low	High	Low
Speed	High	Low	High	Low	High	Low
Volts at 50 Hz (V)	230	230	230	230	230	230
Power (W)	7.5	5	14	10.5	19	9
Specific Fan Power (W/l/s)	0.33	0.25	0.29	0.27	0.21	0.24
Current (A)	0.051	0.049	0.083	0.067	0.094	0.07
Performance (l/s)	27	20	48	38	89	37
Sound @ 3m dB(A)	25	22	38	29	41	32
Weight (Kg)	0.55	0.55	0.99	0.99	1.80	1.80
IP rating*	IP45	IP45	IP45	IP45	IP45	IP45

* PIR model meets IPX4 standard

Performance Comparison

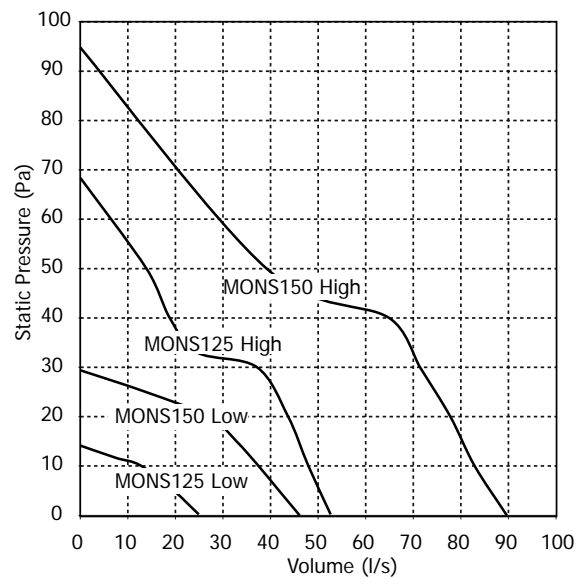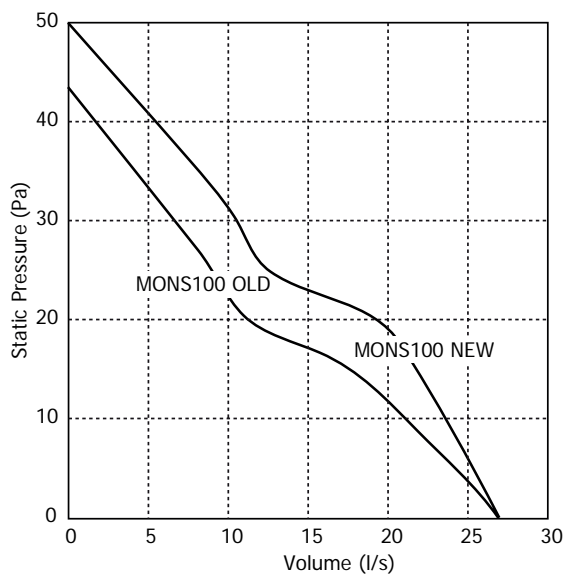

Dimensions

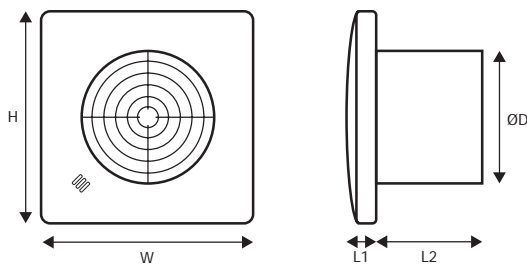

MODEL	H	W	L1	L2	ØD
MONS100	160	160	22	80	99
MONS125	185	185	29	100	120
MONS150	227	227	30.5	111	146

Call now to find out more: 01823 690 290

www.nationalventilation.co.uk Email: info@nvagroup.co.uk